



(19)

(11) Publication number: **01085768 A**

Generated Document.

PATENT ABSTRACTS OF JAPAN

(21) Application number: **62242486**

(51) Intl. Cl.: **B41J 3/04 B41J 29/00**

(22) Application date: **29.09.87**

(30) Priority:

(43) Date of
application
publication: **30.03.89**

(84) Designated
contracting states:

(71) Applicant: **CANON INC**

(72) Inventor: **TAKADA YOSHIHIRO
SUZUKI AKIO
IZUMIZAKI MASAMI**


(74) Representative:

(54) INK JET RECORDER

(57) Abstract:

PURPOSE: To prevent the deterioration of a recorded image due to the bleeding, runs, etc. of a recording ink, by a method wherein a pressure-fixing means sealing the surface of a recording medium applied with the recording ink is provided on a part of a carry path to seal the surface of the recorded medium by pressurizing.

CONSTITUTION: In recording, a carriage 1 is driven to run from a recording start position, nozzles 10 of a recording head 2 are selectively driven to discharge ink drips, and a recording of dot-matrix pattern is applied on a recording-width part P of a sheet 6B opposed to the respective nozzles in a main-scanning direction. After the completion of the recording for one line, the carriage 1 is returned, the sheet 6B is carried by the amount of the

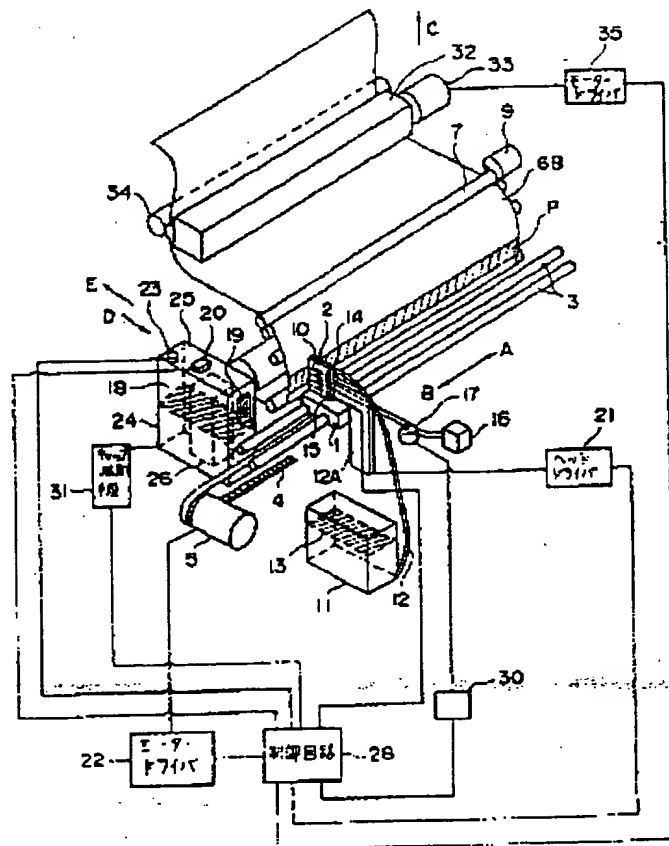

recording width P, and this action is again repeated. The recorded part is carried to a pressure-fixing device 32 disposed on the way of a paper discharge path and subjected to a water-resisting treatment. Thereafter, the gaps in a porous layer are pressurized by the pressure-fixing device 32 to be squeezed for the enhancement of a water resistance.

COPYRIGHT: (C) ~~1989~~
1989, JPO & Japio